

# HEVAC

Control Agencies

## TM-919 7 DAY TIME 240v SWITCH



Advanced pre-setting one week before  
Digital electronic time switch with daily programs  
Repeat programs with 16 on/off setting; and manual over-ride  
Lithium battery power reserve  
Auto time error correction  $\pm 60$ sec, weekly

### ■ Technical Data:

Voltage rating: AC240V 50/60Hz  
Voltage limit: AC 180V~250V

Hysteresis:  $\leq 1$  sec/day (25°C)  
ON/OFF operation: 16 ON & 16OFF  
Power consumption: 2VA(max)

Display: LCD  
Service life: Mechanical 10<sup>7</sup>  
Electrically 10<sup>8</sup>  
Minimum interval: 1 minute  
Weight: approx 120g


Count down: 1 sec-99min 56sec

Pulse: 1 sec-59min 59sec

Load capacity: resistive load: 16A/250V AC  
Lagging load: 10A/250Vac  
lamp load: 2000W

Switching contact: 1 changeover switch  
Power reserve: 3 years (Lithium battery)  
Ambient temperature: -10~+40°C  
Ambient humidity: 35~85%RH

### ■ Connection Diagram:

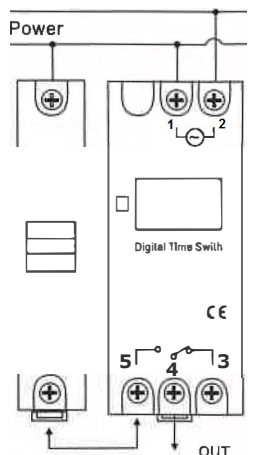

### ■ DISPLAY:



1	Ⓟ	TIMER
2	D+	DAT
3	H+	HOUR
4	M+	MIN
5	⌚	CLOCK
6	C	RESET
7	MANUAL	MANUAL C/R

### ■ Operating instruction:

- To start switch: press reset Key. At the first time, if you want to the present time, please press "⌚" On Board, then press D+, H+, M+ to adjust the number to the present time.
- Enter into programming as follows:

Step	Key	Programming
1	Press Ⓟ	Setting1 ON time (display 1 on)
2	Press H+/M+	Setting hours and minutes
3	Press D+	To select same every day, or different time each day
4	Press Ⓟ	Setting 1 off time (display 1 off)
5	Press H+/M+	Setting hours and minutes turn off time
6	Press D+	If you want the same every day, you need not press this key
7	Repeat step2-6	Set 2-16 on/off time
8	Press ⌚	End

If you do not require 16 settings, press "⌚" to the end.

### ■ Note:

- Time setting should according to the time sequence, couldn't be set crossly
- System with quit automatically if there's no operating within 10 seconds and no data is saved.
- Function 3,4,5 can not be used simultaneously.

### ■ Dimensions:

#### ■ DIN Rail Installation:

