



## SEZ-HAUX-HS

### ANALOGUE AUXILIARY EXPANSION MODULE

#### Features

- Power Supply can be 24VAC or DC
- 0-10vdc Signal Booster
- 0-10vdc Signal Inverter
- 0-10vdc Signal Doubler
- 0-10v Hi-Signal Selector 7 Input
- 2 x 0-10V Input Switching Relays
- Individual Adjustable Relay Turn On Points
- Each Signal Conditioner Has Separate I/O
- Mounts In Most M.C.B Din Rail Enclosures
- Inputs & Outputs Diode Clamp Protected
- Inputs & Outputs Current limited (series resistor)

#### Use

The **SEZ-HAUX-HS** is intended for use as an auxiliary expansion module with various outputs responding to individual 0 to 10 volt input signals.

#### The module incorporates :

One 0-10vdc **Signal Booster** input (X1) useful for when the load on a signal exceeds its output power capabilities ..example : several VSD's or damper motors driven from one 0-10v signal. 3 parallel outputs (Y1,Y2 & Y3) are available (from the common X1 input) each capable of driving loads of 1 mA at 10vDC (>10k ohm load) each.

One 0-10vdc **Signal Doubler** - generating in sequence two 0-10vdc output signals from input X2 . 0 - 4.8 = 0-10vdc on Y4, and 5.2 - 10v = 0 to 10vdc on Y5.

One 0-10vdc **Signal Inverter** that inverts the signal on X3 to a 10-0vdc signal output on Y6.

Two independent **0-10vdc Controlled Relays**. Input X4 controls relay 1, input X5 controls relay 2. Relays have independent c/o contacts rated at 8 amps (resistive).

One **High Signal Selector** Diode array with 7 inputs (X7-X12) , the highest 0-10vdc signal is output on terminal Y7 (allow 0.6 voltage drop).



Made in Australia  
100% Australian Owned Company

### General Specifications

Operating Voltage	24 Volts AC or DC
Power Consumption	
At 24vAC	2.5 VA
At 24vDC	100 mA
Input Terminals	
Signal Input Voltage's	0-10 Volts DC
inputs signal load	0.3ma
Analogue outputs	
ouput signals	0-10 Volts DC
output load ea.	1 mA@ 10vDC
Relay Outputs	
2 x Potential free SPDT rated at 8 Amps resistive / 2 Amps inductive	
ON Point Adjustment	1V to 9.5 Volts DC
Switching differential	fixed at 0.5 volts

---

### Environmental Conditions

Operation	
Ambient Temperature	0...45oC
Humidity	< 85 % RH (Non Condensing)
Storage and Transport	
Ambient Temperature	-5...65oC
Humidity	< 90 % RH (Non Condensing)

---

### Weight

Including Packaging	200 grams
---------------------	-----------


---

### Housing

Colour	Grey
Material	ABS POLYCARB
UV Stabilised	YES
Fire Retardant	YES
Size	L105mm x W105mm x D60mm
Mounting Method	35mm Din Rail Mountable

---

## Terminal Designations

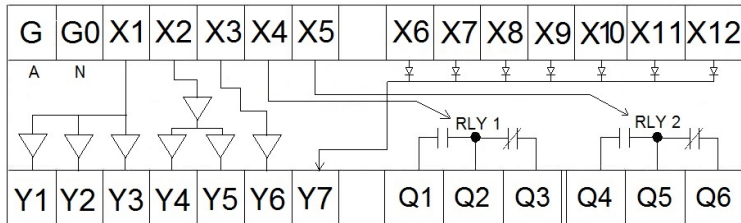


G 24 Volt Supply Active  
 G0 24 Volt Supply Neutral / Ground Reference

X1 Signal Booster Input  
 X2 Signal Doubler Input  
 X3 Signal Inverter Input  
 X4 Relay 1 Control Input  
 X5 Relay 2 Control Input  
 X6-X12 HI-Signal Inputs

Y1 Booster Output 1  
 Y2 Booster Output 2  
 Y3 Booster Output 3  
 Y4 Signal Doubler Output 1  
 Y5 Signal Doubler Output 2  
 Y6 Inverted Signal Output  
 Y7 HI-Signal Output

Q1 Relay 1 N/O Contact  
 Q2 Relay 1 Common  
 Q3 Relay 1 N/C Contact

Q4 Relay 2 N/O Contact  
 Q5 Relay 2 Common  
 Q6 Relay 2 N/C Contact

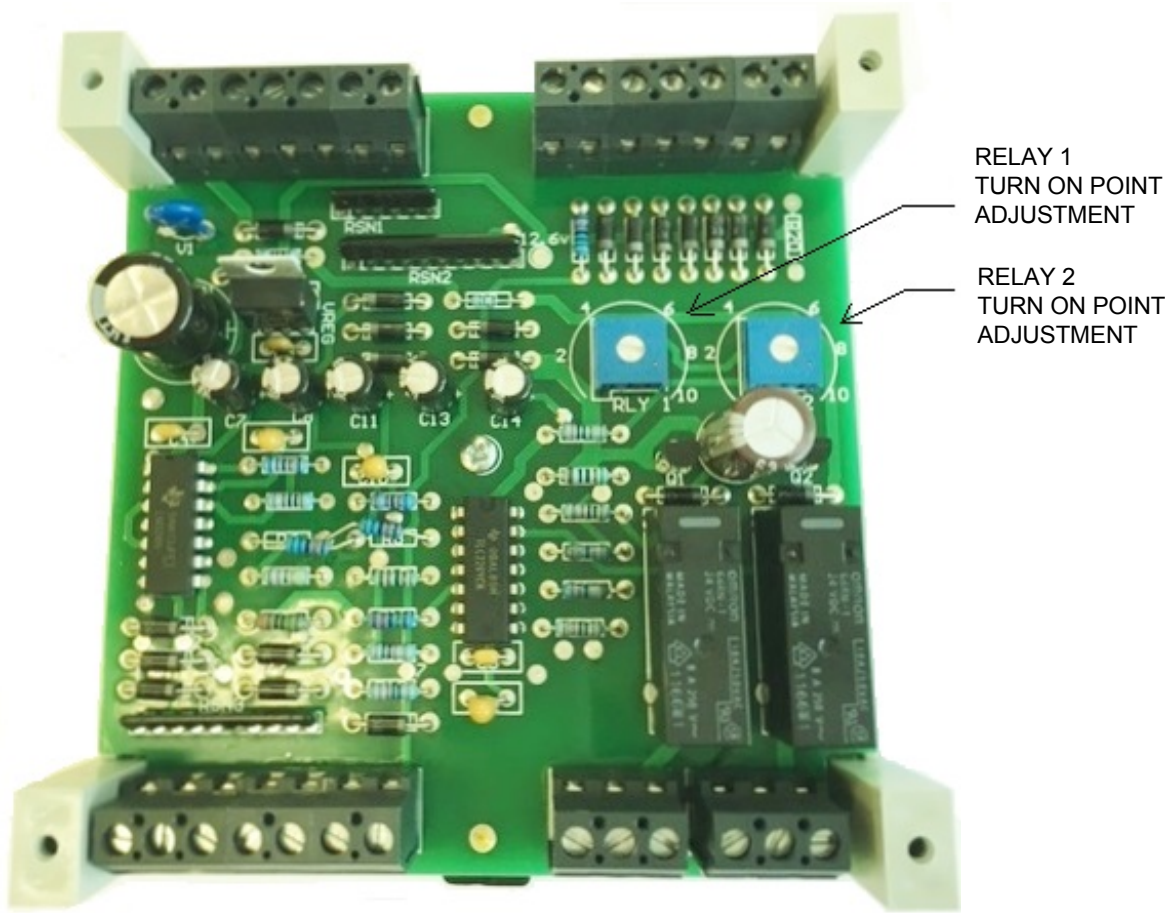

RELAY 1  
 TURN ON POINT  
 ADJUSTMENT

RELAY 2  
 TURN ON POINT  
 ADJUSTMENT

