

MLD-95A-AC

24vAC SIREN + STROBE ALARM

General Overview

The combined Siren & Strobe can be used for both audio and visual warning/alarming. This unit is typically combined with our *controllers* to provide a complete Gas Alarm detection solution.

- Strobe alarm (Flasher) for Lo-Alarm (or warning)
- Siren & strobe (Sounder & flasher) for Hi-Alarm (Final Alarm).

It is suitable for wall/panel mounting (with 2 screws) in the direction shown in the picture to the right.



Technical Specifications


Model Number	MLD-95A
Input Voltage	24VAC +/- 1%
Max Current	250mA
Max Power	6 VA
Sound	105dB +/- 3dB at 30cm
Available Colours	Red
Physical Dimensions	122 x 48 x 72 mm

Wiring Information

	Siren	Strobe
Red Wire = 24VAC	Yes	Yes
White Wire = 24VAC	No	Yes

Note: Both red and white wires active gives same result as red active only.

Wiring Diagram

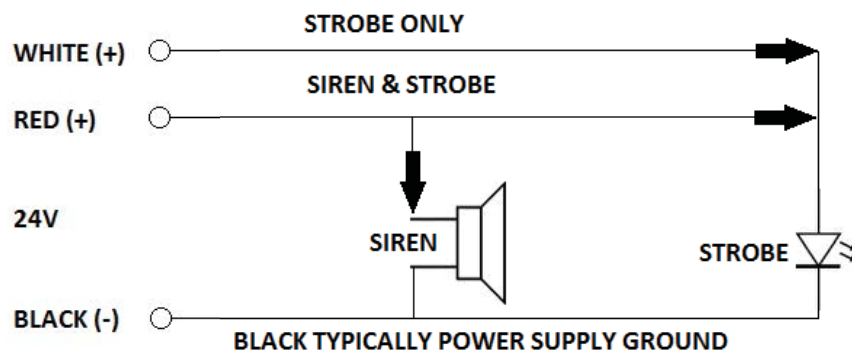

Physical Characteristics

