

HEVAC

Control Agencies



OPRT-24v

DELAY OFF (O/P RUN-ON) TIMER


RUN-ON TIMER 10 Sec. ~ 15 Min.

- 24vAC Powered & Manufactured to Australian Standards.
- Indication Lamps for I/P & O/P status & Timer running.
- 24v 10Amp Res. (2.5 Amp inductive) Relay Output.
- Input & Output Mains can be Separate Phases
- Din rail mount low profile.

Typical Application Use :

Adjustable time delay module intended as a RUN-ON timer responding to On/Off 24v input. Typical applications include as a fan or pump run on timer, triggered ON with the the input switch & timed run on for the output after the switch is turned off. Two indication lamps indicate output status & timer running. The timer is designed to respond to a constant On/Off change of input state not a momentary input . Run on time can be set from 10 seconds to 15 minutes.

ADJUSTMENTS & INDICATION LEGEND

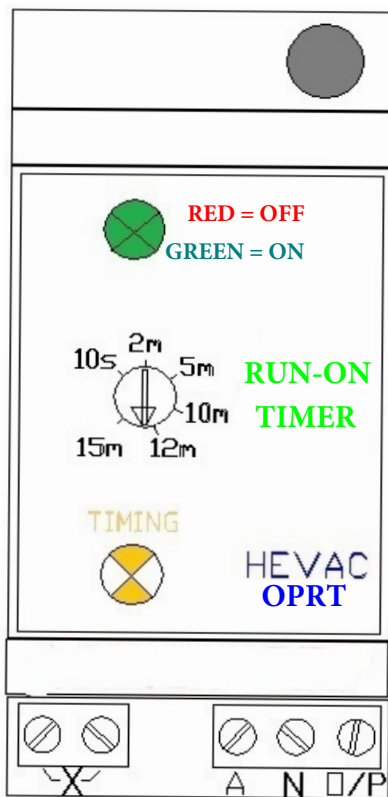

OUTPUT ON/OFF STATUS


OFF = LED RED COLOR
ON = LED GREEN COLOR

TIME DELAY ADJUSTMENT
POTENTIOMETER
10 Sec ~15 Minutes

RELAY CONTACTS RATED
AT MAX 12 Amps Resistive
(3 Amps Inductive)

24v INPUT SWITCH
(DOUBLE TERMINAL
FOR LOOPING)

MODULE POWER
& OUTPUT
24VAC

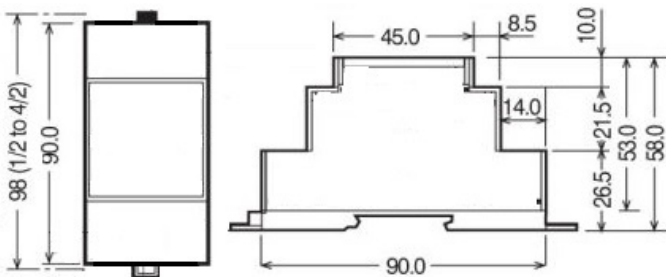

DIMENTIONS

ELECTRICAL CONNECTIONS

