



HRT-8hr-240v **RUN TIMER**


4min. ~ 8Hr. DELAY OFF TIMER

- 240vAC Powered & Manufactured to Australian Standards.
- 4 Time delay settings : 4min, 2 Hr, 4Hr, & 8Hr.
- 8amp (res.) potential free relay output.
- Potential Free 240v 5 Amp rated (resistive) Relay Output.
- Toggle On / Toggle Off selection jumper.
- Built using standard CLIPSAL 2000 wall plate.

Typical Application Use :

The timer circuit board is directly mounted on the back of a standard Clipsal 2000 wall plate and can be used with Clipsal's standard mounting plates & extension blocks if required. The HRT timer incorporates a front mounted push button. The timer can be set to allow or disable Toggle OFF / ON operation (if the push button is pressed again) via an on board selector jumper. The timer has a 4 way dip selection switch to set the run time delay as 4 minute, 2 hour, 4 hour or 8 hours. Typical applications include : Meeting room A/C Run Timer, Stairway Lighting Timer or as temporary Fan Ventilator Timer.

ADJUSTMENTS & INDICATION LEGEND

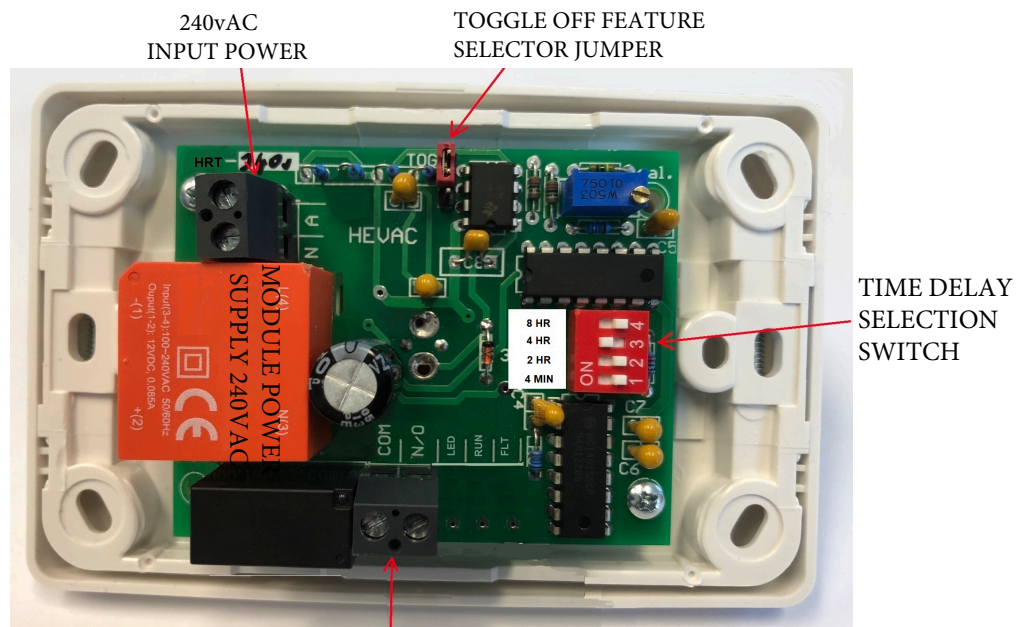

VOLTAGE FREE RELAY SPST CONTACTS
rated @ max 5A (res.)(2A Ind.)

ELECTRICAL CONNECTIONS

