


# HEVAC

## Control Agencies

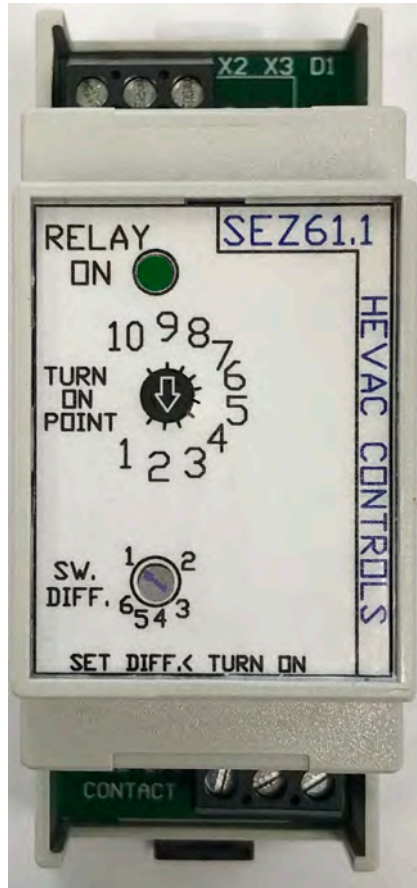

## SEZ61.1

**0-10vDC CONTROLLED  
10A RELAY WITH TURN ON  
POINT & SWITCHING  
DIFFERENTIAL ADJUSTMENT**

- Australian Designed & Manufactured.
- 1-10vdc Input Set Point Adjustment
- 1-6v Switching Differential Adjustment
- Relay Energised Status Led
- Potential Free 10A/240v rated Output relay with C/O contacts
- 2 module Standard Din module Enclosure.


***Typically used in conjunction with controllers that produce a 0-10vdc output signal in reference to a common 24vac neutral. The SEZ61.1 internal relay has change over contacts (spdt) and is rated at 240vAC @10 Amps (resistive). The module has two adjustments - one to set the trigger level in volts dc (Turn ON point) relative to input and the other adjustment sets the switching differential (hysteresis) - how much signal in volts dc that the input signal has to fall below the turn on point before the relay de-energises***

**TECHNICAL SPECIFICATION**


GREEN LED ON INDICATES INPUT VOLTAGE ABOVE SETPOINT SETTING

INPUT SETPOINT ADJUSTMENT

SWITCHING DIFFERENTIAL ADJUSTMENT

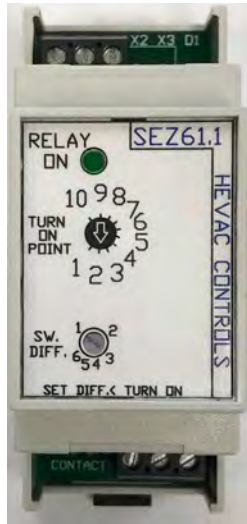

**DIMENSIONS**

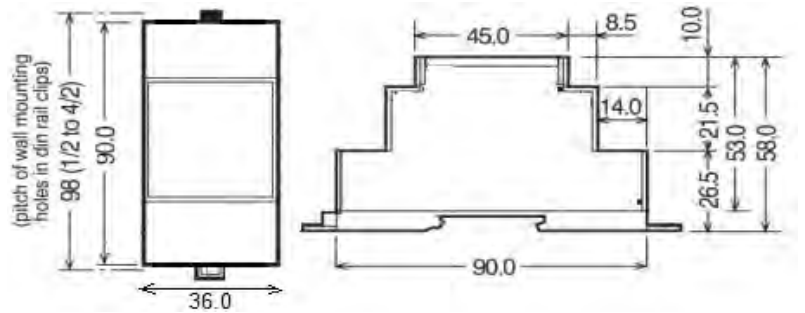

**ELECTRICAL CONNECTIONS EXAMPLE**

